




Directional Couplers

C1-B66, 50db Forward Directional Coupler, low PIM
 Single section (slabline) coupler.
 TYPE 7-16 DIN

Model	C1-B66	
Frequency range	800 - 1000 MHz	
Coupling Value forward	50 dB +/- 0.5 dB	
Directivity	TYP	MIN
	30 dB	25 dB
Insertion Loss 800 MHz	0.03 dB	0.07 dB
VSWR and (Return Loss) Input and Output Coupled Port	1.07 (30 dB) 1.15 (23 dB)	1.12 (25 dB) 1.3 (17.7 dB)
Impedance	50 Ω	
Intermodulation IM3 (2 x 43 dBm carrier)	160 dBc	
Max. Power	500 W Avg, 5KW Peak	
Termination Max. Power	3 W Avg	
Connectors	Main m/f TYPE 7-16 DIN, flange with O-ring Coupled ports - SMA female	
Material: Housing Inner Conductor & Connectors	Aluminum, Conversion Coating Brass, Silver Plated	
DC continuity Input \leftrightarrow Output Input \leftrightarrow Coupled Port	RF and DC RF only	
Temperature range	-25 to +75 $^{\circ}$ C	

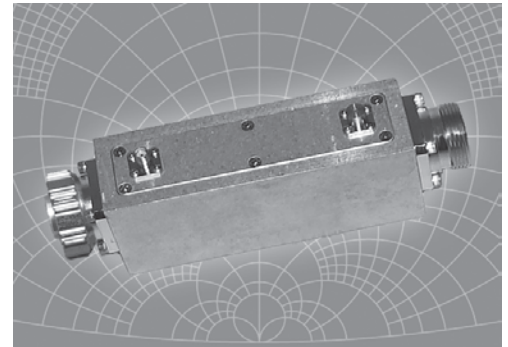

R&D Microwaves LLC single section, airline, Dual Directional Coupler covering wireless applications in the 800-1000 MHz band. Supplied with TYPE 7-16 DIN connectors, this design offers RF power ratings of 500 Watts (3.0 kW peak). Insertion loss is less than 0.15 dB, RL is better than 25 dB, coupling is 50 dB with directivity better than 25 dB across the entire band. These couplers are ideal for antenna power monitoring applications in base station installations. Custom connectors configuration and enhanced directivity models available.

Made in USA.

- 500 W average power
- Low VSWR and Loss
- High reliability, Low PIM
- ROHS Compliant

